


10 - Site Equipment





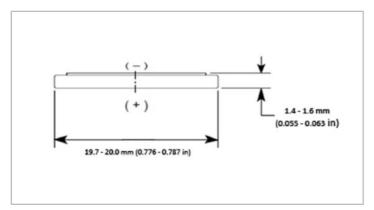

Technical Specification Nominal capacity (15kΩ Cont.,2.0 V cut-off) 85 mAh Nominal voltage (at + 20 °C) 3.0 V Standard Continuous Discharge Current 0.1 mA Maximum Continuous Discharge Current 6 mA Maximum Pulse Discharge Current at 1 sec 20 mA Nominal Energy 255 mWh AC Impedance ② 1kHz 8.5Ω

Acel part number (AC01067)

Intense 2016 lithium battery pk=5

Features and benefits

- Industry Highest Cell Capacity & High Energy
- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Child-Safe Markings & Retail Packaging
- Wide operating temperature range (-20°C / +60°C)
- Low self-discharge with long operating life (<2% after 1 year of storage at + 20 °C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
 - o Safety: IEC 60086-4
 - o Transport: UN 38.3
 - REACH compliance
 - Quality: ISO 9001, Duracell World Class Continuous Program

10-AC01067-2024-V1

