




Acel part number (AC02065)

**CR2032 lithium coin battery
pack of 12**

Features and benefits

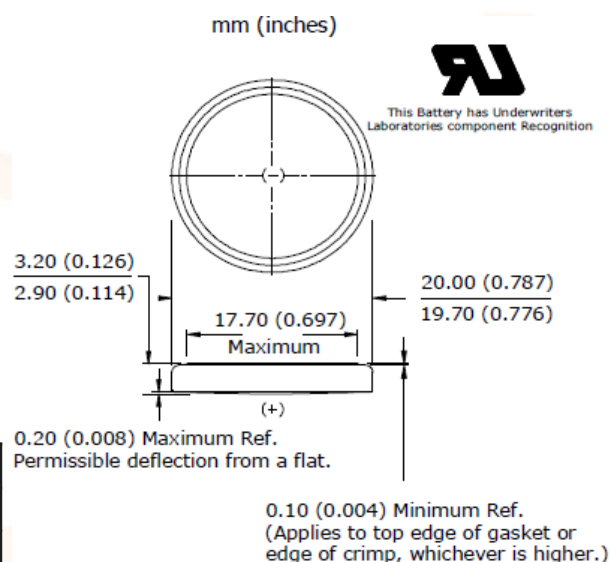

Technical Specification

| Attribute | Value |
|--|-------|
| Classification: "Lithium Coin" | |
| Chemical System: Lithium / Manganese Dioxide (Li/MnO ₂) | |
| Designation: ANSI / NEDA-5004LC, IEC-CR2032 | |
| Nominal Voltage: 3.0 Volts | |
| Typical Capacity: 240 mAh (to 2.0 volts) (Rated at 15K ohms at 21°C) | |
| Typical Weight: 3.0 grams (0.10 oz.) | |
| Typical Volume: 1.0 cubic centimeters (0.06 cubic inch) | |
| Max Rev Charge: 1 microampere | |
| Energy Density: 198 milliwatt hr/g, 653 milliwatt hr/cc | |
| Typical Li Content: 0.109 grams (0.0038 oz.) | |
| UL Listed: MH12454 | |
| Shipping: For complete details, please reference: Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations | |

Simulated Application test

Typical Performance at 21°C (70°F)

| Schedule: | Typical Drains: at 2.9V (mA) | Load (ohms) | Cutoff 2.0V (hours) |
|------------|------------------------------------|----------------|---------------------------|
| Continuous | 0.19 | 15,000 | 1,263 |

10-AC02065-2024-V1