


10 - Site Equipment





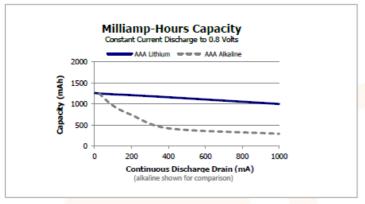

Technical Specification

Attribute Value

Classification: "Cylindrical Lithium"

Chemical System: Lithium/Iron Disulfide (Li/FeS2)

Designation: ANSI 24-LF, IEC-FR03

Nominal Voltage: 1.5 Volts

Compatible With:

Storage Temp: -40°C to 60°C (-40°F to 140°F) Operating Temp: -40°C to 60°C (-40°F to 140°F)*

Typical Weight: 7.6 grams (0.3 oz.)

Typical Volume: 3.8 cubic centimeters (0.2 cubic inch)

Max Discharge: 1.5 Amps Continuous

(single battery only) 2.0 Amps Pulse (2 sec on / 8 sec off)

Max Rev Current: 2 uA

Lithium Content: Less than 1 gram


Typical IR: 140 to 180 milliohms (depending on method)

Shelf Life: 25 years at 21°C

Acel part number (AC02071)

Ult Lith AAA Lithium battery

Features and benefits

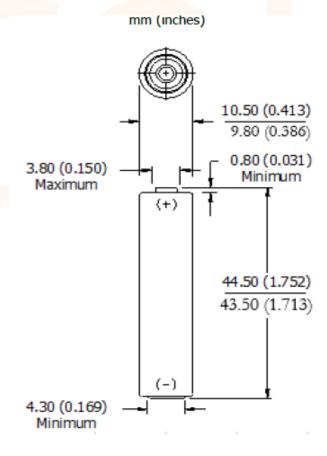

10-AC02071-2024-V1

