




## 1 - Wiring Accessories

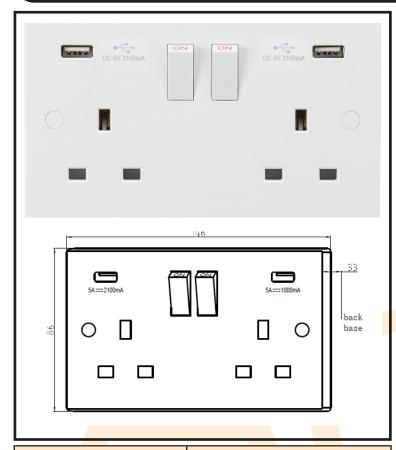

Technical Specification	
DESCRIPTION	13A 2G Switched Socket with Dual USB Charger 5V DC 3.1A
NET WEIGHT (KG)	0.219
FINISH	White
DIMENSIONS (MM)	Height - 86, Width - 146, Projection - 9
MINIMUM MOUNTING BOX DEPTH	25-35mm
CONSTRUCTION	Construction - Thermoset resin
IP RATING	IP20
INPUT VOLTAGE	230V 50Hz
SWITCH TYPE	Single Pole
EARTH TERMINAL	Yes
LOAD/MAX. LOAD	13A
TERMINAL CAPACITY	2 x 2.5mm² or 1 x 4.0mm²
NO. OF USB PORTS	2
NO. OF TYPE-A PORTS	2
USB CHARGING	5V DC 3.1A (shared)
ADDITIONAL FEATURES	Overload and short circuit protection
WARRANTY	2year(s)
MANUFACTURED IN ACCORDANCE WITH	BS 1363-2, EN 60950-1
ORIGIN OF MANUFACTURE	China
EAN	5051178132746

## AC10025

## Socket 2G Switched 13A with 2 x USB

Hard wearing, all purpose Square Edge 9mm plate with anti-microbial properties

- 13A rated
- Built in Dual USB Charger 5V DC 3.1A (shared)
- Top access to captive terminals to speed up installation
- Twin earths
- Includes screw cap covers
- Min. mounting box depth: 25mm-35mm dependent on wiring conditions

1-AC10025-2021-V1.

