


## 1 - Wiring Accessories



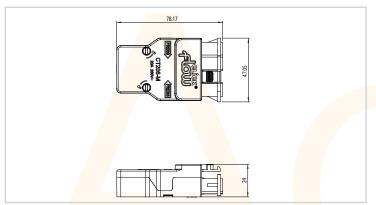

79mm (W) x 47mm (D) x 24mm (H)
250V~ 50Hz
20A
2.5mm² Max. Solid or Flex
Yes
-5°C to +40°C
10 Years

## AC12315

## **4 Pole Male Connector**

- 20A rated
- 4 pole connector
- Male (output) connector
- Push-in terminals
- Locking mechanism integrated
- Quick fit cover
- Fast fit cable restraints

1-AC12315-2021-V1

