




AC19726

2G Sw. Safety Skt + USB's

- Stylish smooth profile plate
- 3 pin safety shuttered socket outlets. All 3 pins of the plug must be inserted for the shutters to open
- Type A & Type C USB outlets provided
- Independent Charging: 5V DC, 4.2A – USB Type A (2.4A), USB Type C (3A)
- Fits on to 25mm deep backbox
- The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V
- White mouldings uses Antibacterial & Antiviral Certified material

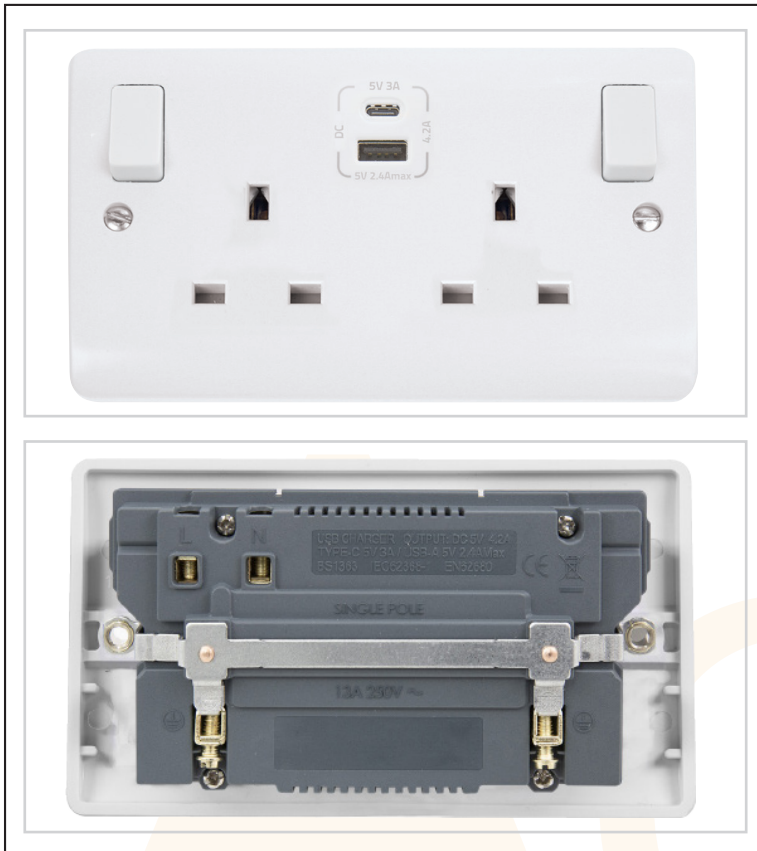

Technical Specification	
Plate Dimensions	146mm (W) x 86mm (H) x 9.5mm (D)
Maximum Voltage	250V~ 50Hz
Load Rating	13A
Fixing Centres	120.6mm
Terminal Torque	1.2Nm
Terminal Capacity	3 x 2.5mm ² or 2 x 4mm ²
Single Pole	Yes
Twin Earth Terminals	Yes
USB Charging Output	5V DC, 4.2A Total
USB Type	USB Type "A" & Type "C"
USB Standby Current	2mA
Product Markings	DC, 5V 3A, 5V 2.4A max, 4.2A
Operational Temp.	-5°C to +40°C
Warranty	20 Years, 1 Year Electronics

1-AC19726-2021-V1