


## 7 - Cable Management

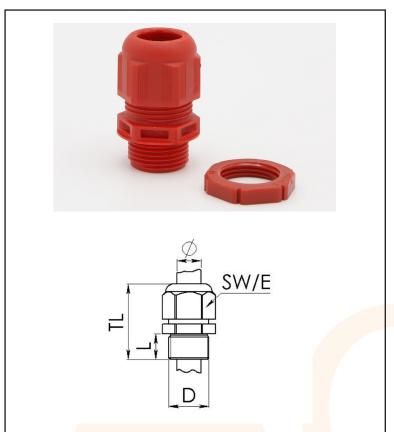

## **AC2666**

Cable gland pack, contains 10 cable glands, RDE and 10 locknuts.

Technical Specification	
Material cable gland	Polyamide
Protection class	IP68 (5 bar 30 min), IP69
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	750 °C
Thread type	M
Ø Connection thread D	20
Lead	1.5
Length screw-in thread	10 mm
Ø cable diameter min Ø	7.5 mm
cable diameter max	14 mm
Total length TL	36 mm - 45 mm
Colour	Red - RAL 3000
Packing unit	10

2-AC2666-2021-V1

