


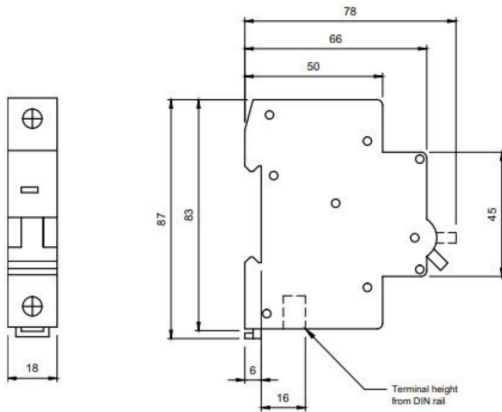

### AC3286

#### 50 Amps 1 Pole MCB 6kA B Curve

EN 60898, 6kA Rating, 18mm Width, Terminal Capacity: 1.0-25mm<sup>2</sup>, Cable & fault protection for added safety, flexible install options, range uniformity, easily identify the fault, simple to resume supply, more sensitive than fuses, less maintenance and replacement cost

#### Technical Specification

|                                        |                                     |
|----------------------------------------|-------------------------------------|
| Standards                              | IEC 60898, EN 60898                 |
| Certification                          | CE, SEMKO                           |
| Characteristic Curves                  | B,C                                 |
| Rated Current (In)                     | 6, 10, 16, 20, 25, 32, 40, 50 & 63A |
| Rated Voltage (Ue)                     | AC 230(240)                         |
| Rated Frequency                        | 50/60Hz                             |
| Rated impulse withstand Voltage (Uimp) | 4kV                                 |
| Energy Limiting Class                  | 3                                   |
| Operating Temperature                  | -5° to 40°C*                        |
| Pollution Degree                       | 2                                   |
| Overvoltage Category                   | III                                 |
| Terminal Protection                    | IP20                                |
| Mounting                               | 35mm DIN Rail                       |
| Terminal Type                          | Tunnel                              |
| Recommended Terminal Torque            | 2.0Nm                               |

3-AC3286-2021-V1