




AC33705

63A 3 Pole Door Interlock with Metal Shaft

Padlockable in the OFF position, Rear mount or snap on din rail mount (35mm), Shaft Length 282mm, Shaft 8mm across flats (Hexagonal) / length 282mm, Use rubber gasket (LBGASKET) for IP65 rating, AC-22 switch rating, Shaft can be cut down

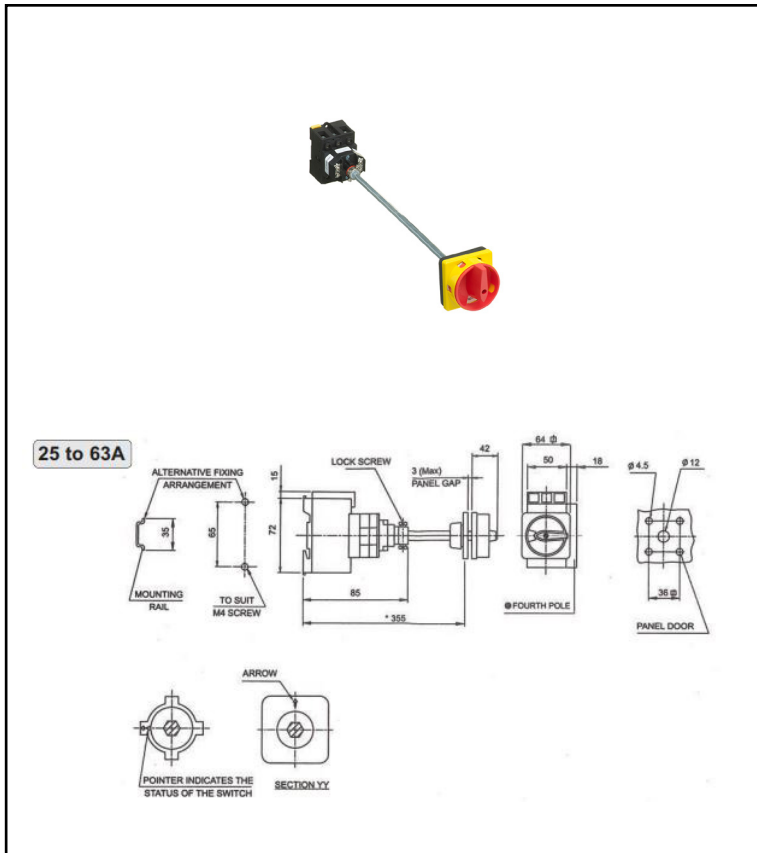

Technical Specification	
Approvals	CB, CE & SEMKO
UL Standard	UL508
International / European Standard	IEC & EN 60947-1 and 3
Rated operational voltage Ue	IEC & EN 690V UL 600V
Main switch: Isolating voltage up to	750
Rated impulse withstand voltage Uimp	6V
Rated uninterrupted current Iu	63A
Fuse rating, class J	70A
Rated Fused short circuit current	10A
Max fuse size (Type gl)	63A
Rated Fused short circuit current	30A
Single/ Multiple strand wire (mm ²)	2.5 (min) - 25 (max)
Fine strand with sleeve mm ²	2.5 (min) - 10 (max)
American wire gauge	6 AWG
Recommended Tightening Torque	2.0Nm

3-AC33705-2021-V1