


## 3 - Circuit Protection & Industrial Control



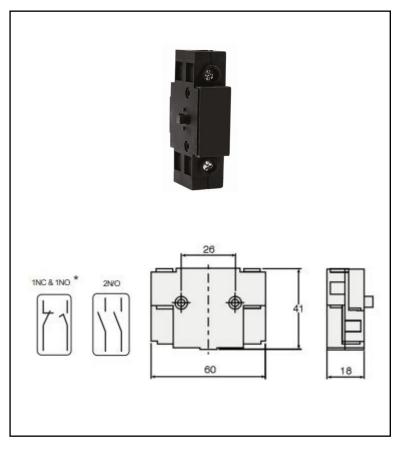

## **AC33707**

## 20-63A Aux Switch, 1N/C & 1N/O R/M Volt Free Contact

IEC & EN60947-3, Rear mount for door interlocked & enclosed switchdisconnectors, Volt free contacts rated at AC-15 6A 230V / 4A 415V, Maximum terminal capacity 1.5mm2

Technical Specification	
IEC / EN	16A 500V
AC15	220-240V 6A 380-440V 4A
Single / multiple strand wire (mm2)	1.0 (min) - 1.5 (max)
American wire gauge	16 AWG
Recommended tightening torque	Terminals 0.8Nm, Fixing Screws 0.3Nm

3-AC33707-2021-V1

