



3 - Circuit Protection & Industrial Control

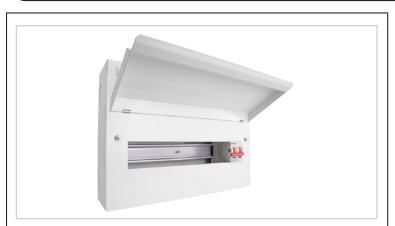

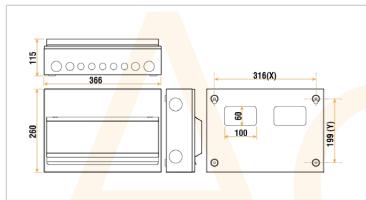

| Technical Specification | |
|-------------------------|-----------------------------------|
| Dimensions With Door | 366mm (W) x 260mm (H) x 115mm (D) |
| CU Knockouts (Top) | 4 x Ø20mm, 2 x Ø25mm & 2 x Ø40mm |
| CU Knockouts (Bottom) | 5 x Ø20mm, 2 x Ø25mm & 2 x Ø32mm |
| CU Knockouts (Sides) | 2 x Ø40mm |
| CU Knockouts (Rear) | 2 x 100mm x 60mm |
| Nominal Voltage | 230V~ 50/60Hz |
| Tail Clamp Capacity | 25mm² |
| Tail Clamp Torque | 1.5Nm |
| Main Sw. Terminal Cap. | 35mm² |
| Main Sw. Terminal Torq. | 2.5Nm |
| Operational Temp. | -5°C to +40°C |
| | |
| | |
| | |
| | |

AC38004

16 Way Cons. Unit + Iso. Sw

- · Straight mains board
- Metal consumer unit enclosure
- White finish (RAL 9003)
- Mains tail clamp fitted as standard
- 100A Mains Switch fitted
- 2 x Blanks Supplied (Product Code: AC38070)
- 14 free ways
- 10 year warranty (3 year warranty for devices)

3-AC38004-2022-V1

