


Acel

4 - Lamps & Lighting

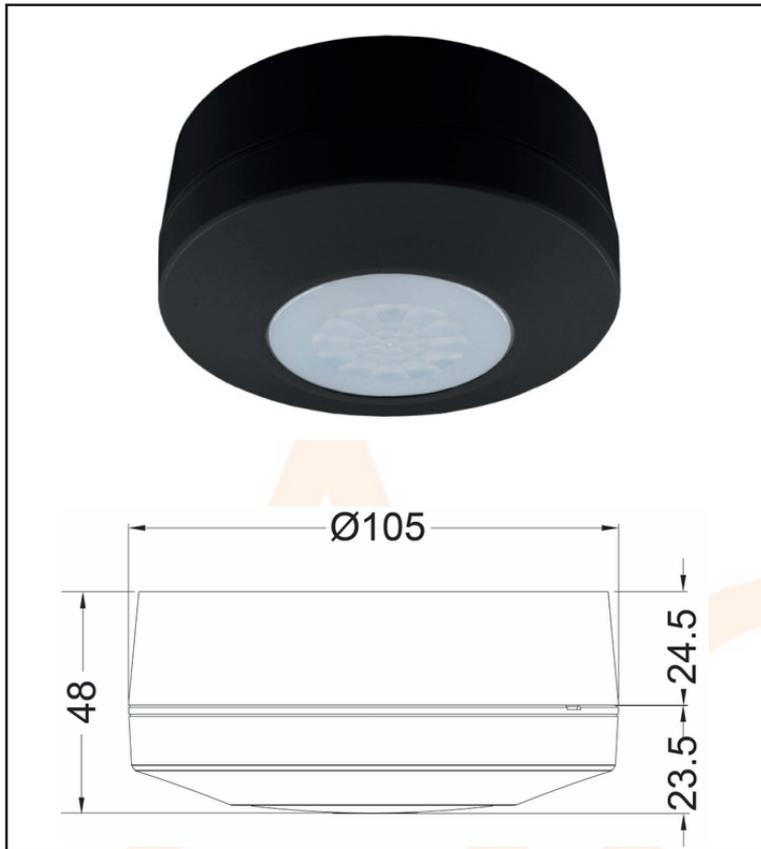

AC444797

Single Channel 360° Ceiling PIR Presence/Absence Detector

Presence or Absence detection designed for the automatic control of lighting installations.

Optional IR remote control for remote set-up and adjustment (sold separately).

Option for manual push button operation.

Multi sensor parallel wiring capability.

Up to 600W LED load for commercial lighting installation.

Discreet flat PIR lens technology.

Adjustable time delay and lux settings with sensitivity control via remote control IR10AB as shown below. (Remote Not Included).

Technical Specification	
Operating Voltage:	230V AC 50Hz
Installation Type:	Surface
Earth Class Rating:	Class II
Operating Temperature:	-20°C to 40°C
Ingress Protection Rating:	IP54
Max Mounting Height:	2.5 to 4m
Detection Angle:	360°
Detection Range:	8m at 2.5m Mounting Height, 10m at 4m Mounting Height
Lux Level:	10 to 2000
ON Time Adjustment:	30 Seconds to 30 Minutes
Standby Consumption:	<0.5W
Manual Override:	Yes (IR10AB Remote Required)
Accessories (Optional)	IR10AB (Remote Control)



IR10AB Remote Control.

