


## 4 - Lamps & Lighting



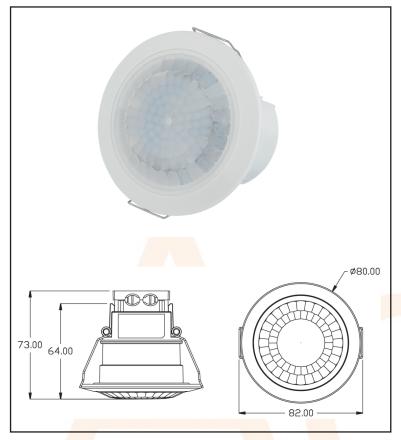

230V AC 50Hz
Flush
Class II
-20°C to 40°C
IP44
3m
360°
6m Presence, 12m Motion
600W LED, 600W Fluorescent, 2000W Halogen or 250W Fan
2 to 2000
1 Minute to 30 Minutes
Yes (Distance)

## **AC444798**

## 360° Flush Ceiling Detector - Single Channel

Switches lights ON when presence and motion is detected in combination with light levels.

Enhanced 360° detection zone for optimum coverage.

Ideal for energy saving installations in the workplace, corridors, offices, toilets etc.

Units Can Be Wired In Parallel up to 8 units, (Not Exceeding Total Load).

IP44 Environmental Rating (Internal Use Only).

Perminant On Facility, (Pulse Override).

AC444798 - 2023 - V1

