




AC447259

OREINT LED BOLLARDS

- Die cast aluminium high quality bollard with functionality allowing switching light temperature between 3000K and 4000K
- Available in heights of 630mm and 980mm
- LED replacement for 20W linear halogen fittings
- Very high efficacy exceeding 96lm/W
- Wide operating ambient temperature range of -20°C to +40°C
- Suitable for switching by external PIR, Microwave or Photocell

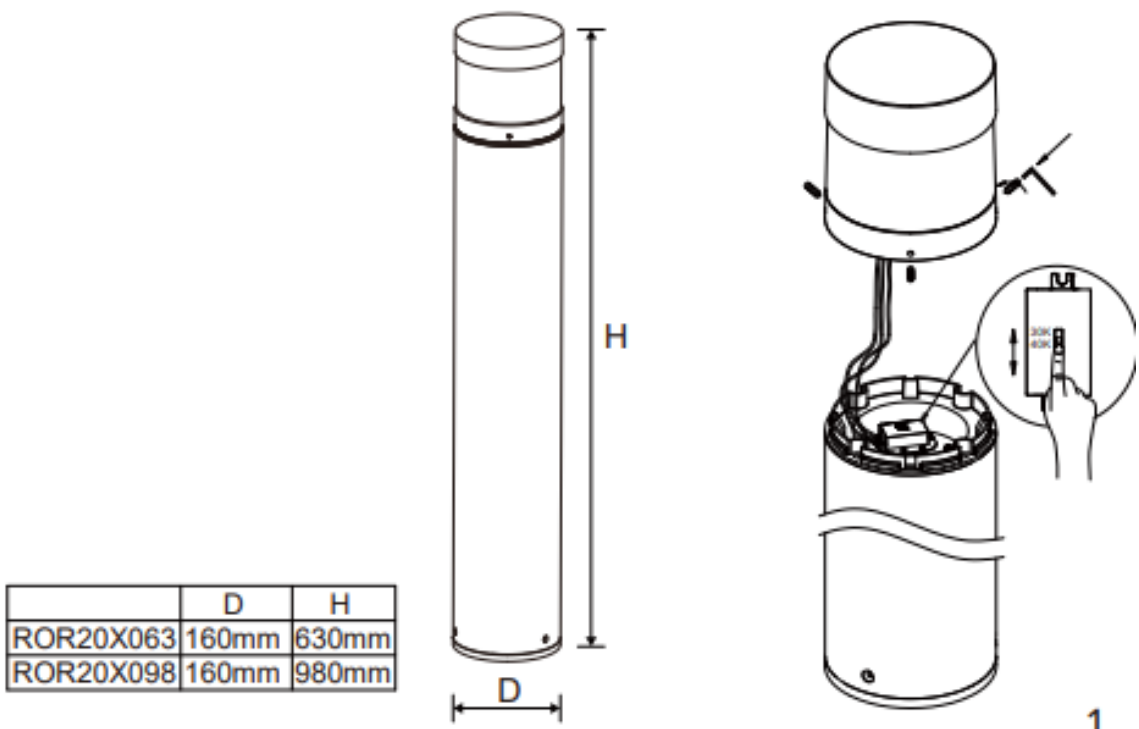

	D	H
ROR20X063	160mm	630mm
ROR20X098	160mm	980mm

Technical Specification

Total Power (W)	20.4 / 20.1
Total Light Output (lm)	1950 / 2020
Efficacy (lm/cctW)	96 / 101
CCT (K)	3000 / 4000
CCT Selectable	Selectable
Operating Temperature	-20°C to +40°C
CRI	80
Pre-Built Emergency	NO
Weight (kg)	4.9
Caron Qty	1

4-AC447259-2024-V1