


g

4 - Lamps & Lighting



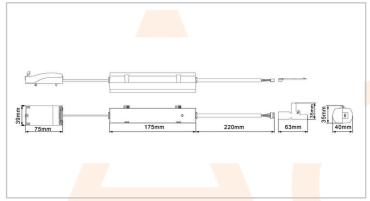

Input Power (Max)	3.5w
Emergency outpout	2w
Power (w)	ZW
. ,	200im
Lumen (lm)	
Input Voltage	220-240 Vac 50-60 Hz
Input Current (max)	22 mA
Protection	IP 20
CCT	6000k
Lifetime	30,000 hours
Ambient Temperature	0 to 45
Emergency Conversion	1
Time (s)	
Emergency Operating	3
Time (h)	
Battery charging time (h)	24
Battery life (Years)	4
Battery Type	Li-lon
Battery Capacity (mAh)	2600
Battery Voltage	3.6
Dimensions LxWxD (mm)	175 x 35 x 40
Warm-up time to 60%	Instant full light

AC448165

LED Panel emergency module

Features & Benefits

- 1. Non-Maintained > 3 hrs
- 3. Self-adhesive green/white dual colour LED Pad (stick on the corner of LED panel)
- 4. Push-wire terminal block included
- 5. 4 years battery life
- 6. Universal emergency module for all LED panels (including AC448160 and AC448161)
- 7. Fast fit and easy installation

4-AC448165-2023-V1

