




AC5680

Self Test Emergency Bulkhead

The AC5680 is a 7.3 watt maintained/non-maintained self testing emergency bulkhead. The AC5680 is supplied with a full legend set. It can be installed in both switchable maintained or non-maintained option. The high lumen output ensures it meets the requirements of most applications.

Features

- Long life LED technology
- Automatically carries out monthly & annual tests.
- Maintained / Non-maintained operation
- Can be ceiling or wall mounted
- Optically enhanced diffuser
- Polycarbonate construction
- Lightweight and easy to install
- NiCd battery
- Legend kit - AC5682
- Low environmental impact & running costs
- Meets BS EN 60598-1:2008 and other relevant standards
- IP65 weatherproof
- 320lm Maintained Output 210lm emergency output
- Hinged gear tray
- 20mm conduit entry

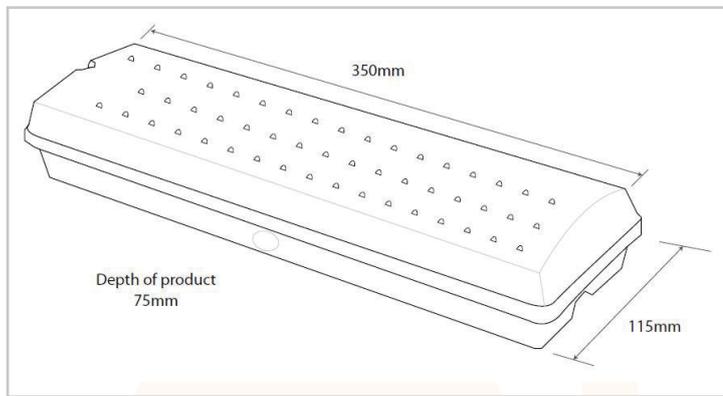

Technical Specification

Light Source	7.3w SMT LED
IP rating	IP65
Emergency Duration	3-Hours (minimum)
Mains voltage	230v 50Hz \pm 10%
Mains current	(Max) 75mA 40mA quiescent
Recharge period	Less than 24 hours
Charge indicator	Integral Green LED
Changeover voltage	As per requirements of BS EN 60598-2-22
Temperature range	0 TO 40 °C
Weight	950gm
Battery	3.6v 2000mAH Nickel cadmium
Lumen output	320lm (maintained) 210lm (emergency)

5-AC5680-2021-V1