


5 - Emergency Lighting, Fire & Safety





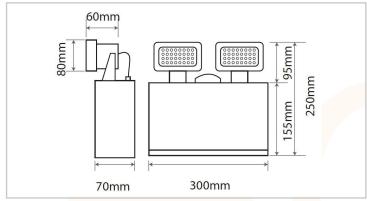

Technical Specification	
Light Source	15w SMT LED (combined)
IP rating	IP20
Emergency Duration	3-Hours (minimum)
Mains voltage	230v 50Hz ± 10%
Mains current	(Max) 150mA 35mA quiescent
Recharge period	Less than 24 hours
Charge indicator	Integral Green LED
Changeover voltage	As per requirements of BS EN 60598-2-22
Temperature range	0 TO 40 °C
Weight	225gm
Battery	9.6v 2200mAH Nickel cadmium
Lumen output	720Lm (Combined)
	(

AC5695

Emergency Twin Spot

The AC5695 is an LED non-maintained IP20 twin spot environmentally friendly emergency light. The AC5695 has a high lumen output (720Lm) which combined with the enhanced lenses gives excellent spacing ratios. The inbuilt green charge LED gives great visibility of the charging state of the fitting.

Features

- Non-maintained
- Long life LED technology
- Non -maintained 3 hour emergency backup
- Low environmental impact
- Low maintenance
- Meets BS EN 60598-2-22 and other relevant standards
- Enhanced optical performance gives excellent spacing distances
- Can be mounted in any orientation.

5-AC5695-2021-V1

