





### AC5717

### Recessed Emergency Downlight

The AC5717 is a 3 watt non-maintained **self test** recessed environmentally friendly emergency downlight. The downlight comes with both open area and corridor lens options ensuring the correct fitting is always available. The inbuilt green charge LED gives great visibility of the charging state of the fitting.

#### Features

- 3W Non-maintained
- Self Test
- Long life LED technology
- Non -maintained 3 hour emergency backup
- Twin Lenses supplied
- BESA box fixings
- Sleek & minimalistic design
- Screw-less terminals
- Low environmental impact
- Low maintenance
- Meets BS EN 60598-2-22 and other relevant standards
- Enhanced optical performance gives excellent spacing distances (15m)

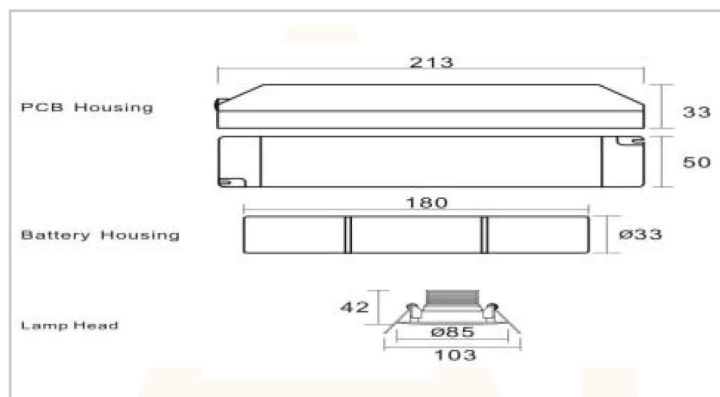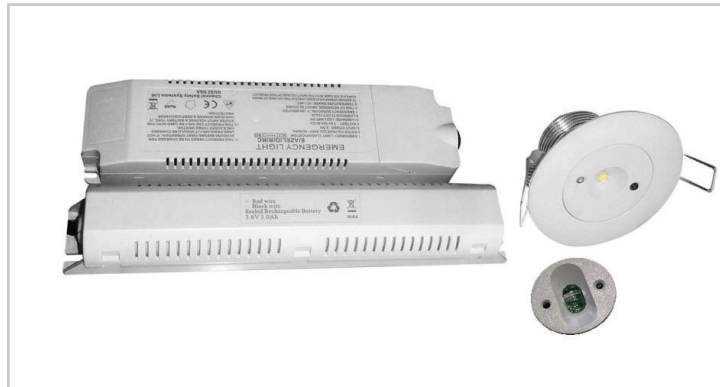

#### Technical Specification

Light Source	3w SMT LED
IP rating	IP20
Emergency Duration	3-Hours (minimum)
Mains voltage	230v 50Hz $\pm$ 10%
Mains current	(Max) 150mA 35mA quiescent
Recharge period	Less than 24 hours
Charge indicator	Integral Green LED
Changeover voltage	As per requirements of BS EN 60598-2-22
Temperature range	0 TO 40 °C
Weight	320gm
Battery	3.6v 2000mAH Nickel cadmium
Lumen output	158Lm (Open Area) 143Lm (Corridor)

**5-AC5717-2021-V1**