


7 - Cable Management



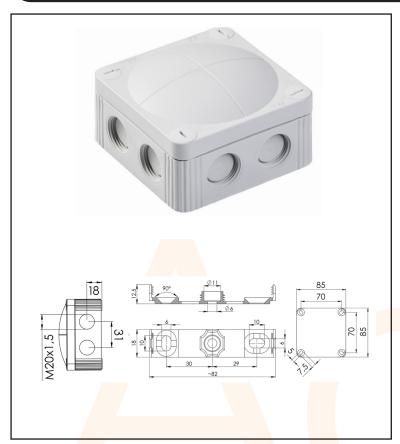

AU		U

Technical Specification	
Material c <mark>able gl</mark> and	Polypropylene
Protection class	IP66 / IP67
Temp. range min	-30 °C
Temp. range max	100 °C
Temperatures during install.	-5 °C - 60 °C
Glow wire test	750 °C
Voltage	400 V
Packing unit	5
Product Color	Grey - RAL 7035
Terminals/poles	5-pole, 4,0 mm ²
Fixing	4 internal openings
Ø cable diameter min	3 mm
Ø cable diameter max	12 mm
External dimensions LxWxH	85 x 85 x 51mm
Type of cable gland	M 20 x 1,5

2-AC7210-2021-V1

