


**AC7311**

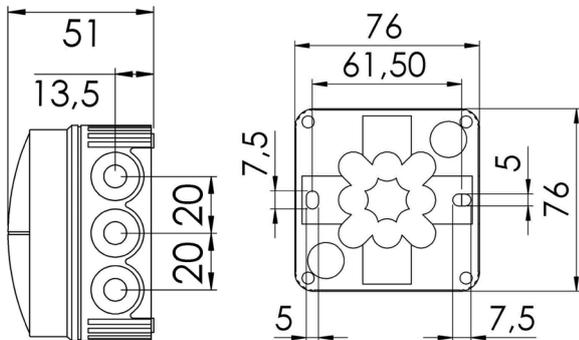

### Technical Specification

Material cable gland	Polypropylene
Temp. range min	-30 °C
Temp. range max	100 °C
Temperatures during install.	-5 °C - 60 °C
Protection class	IP66
Glow wire test	750 °C
Voltage	400 V
Rated current / A (Terminal)	24 A
Terminals/poles	5-pole, 2,5mm <sup>2</sup>
Fixing	2 internal openings
Ø cable diameter min	3 mm
Ø cable diameter max	14 mm
External dimensions LxWxH	76 x 76 x 51mm
Product Color	Grey - RAL 7035
Packing unit	10

2-AC7311-2021-V1