


7 - Cable Management



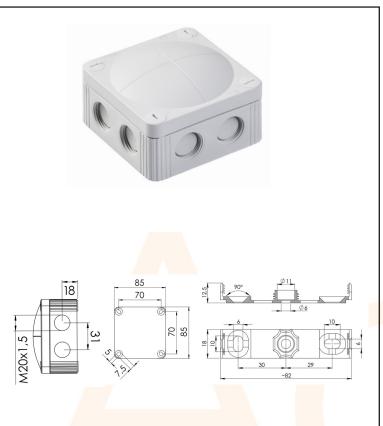

Technical Specification	
Material c <mark>able gl</mark> and	Polypropylene
Temp. ra <mark>nge m</mark> in	-30 °C
Temp. range max	100 °C
Temperatures during install.	-5 °C - 60 °C
Protection class	IP66 / IP67
Glow wire test	750 °C
Voltage	400 V
Terminals/poles	4 mm²
Fixing	4 internal openings
Ø cable diameter min	3 mm
Ø cable diameter max	12 mm
External dimensions LxWxH	85 x 85 x 51mm
Product Color	Black - RAL 9005

AC7331

2-AC7331-2021-V1



Packing unit